

15693-RW-232-PCB1
(SL015B user manual ver. 20)

13.56Mhz ISO15693 reader/writer module
with RS232 interface


CONTENT

1.	MAIN FEATURES	-----	2
2.	PINNING INFORMATION	-----	2
3.	BAUD RATE SETTING	-----	3
4.	COMMUNICATION PROTOCOL	-----	3
4.1	Communication Setting	-----	3
4.2	Communication Format	-----	3
4.3	Command Overview	-----	4
4.4	Command List	-----	4
4.4.1	Get tag information	-----	4
4.4.2	Get block security status	-----	4
4.4.3	Read Block	-----	5
4.4.4	Write data to a block	-----	5
4.4.5	Write AFI	-----	5
4.4.6	Write DSFID	-----	5
4.4.7	Lock block	-----	6
4.4.8	Lock AFI	-----	6
4.4.9	Lock DSFID	-----	6
4.4.10	Control PA status	-----	6
4.4.11	Reset	-----	6

1. MAIN FEATURES

- Tag supported: I.CODE SLI, Tag_it
- Auto detecting tag
- Built-in antenna
- RS232 interface, baud rate 9,600 ~ 115,200 bps
- 4.5 to 5.5V VDC supply
- Operating distance: Up to 80mm, depending on tag
- Storage temperature: -40 °C ~ +85 °C
- Operating temperature: -20 °C ~ +70 °C
- Dimension: 85 × 55 × 7 mm
- Two LEDs, green led is auto light when tag in detection range, red led is controlled by host
- The PA1 pin is low level indicating tag in detection range, and high level indicating tag out

2. PINNING INFORMATION

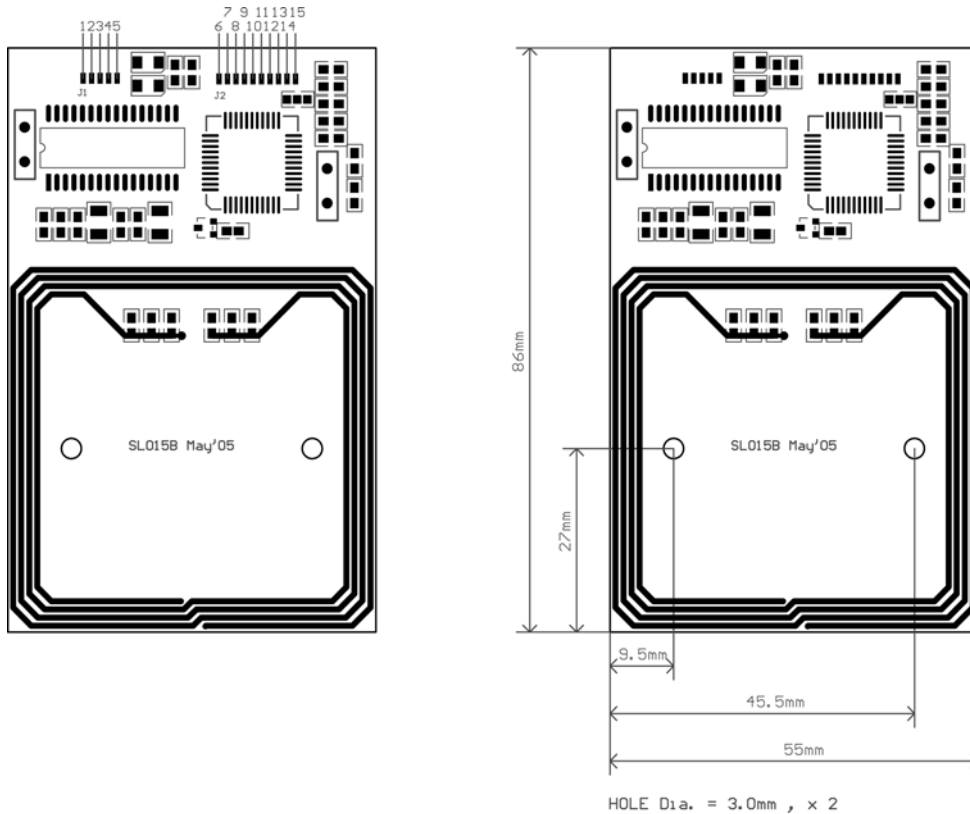

PIN	SYMBOL	TYPE	DESCRIPTION
1	TXD	Output	Serial output port
2	RXD	Input	Serial input port
3	VCC	PWR	Power Supply
4	GND	PWR	Ground
5	GND	PWR	Ground

PIN	SYMBOL	TYPE	DESCRIPTION
6	VCC	PWR	Power Supply
7	PA0	Output	
8	PA1	Output	Tag detect signal: low level indicating tag in detection range, high level indicating tag out
9	PA2	Output	
10	PA3	Output	
11	PA4	Output	
12	PA5	Output	
13	PA6	Output	
14	PA7	Output	
15	GND	PWR	Ground

3. BAUD RATE SETTING

R6 & R7 are two 0 ohm resistances assembled on the bottom layer of module, are used for config baud rate as follows sheet

	R6	R7	Baud Rate (bps)
Assembled	NO	NO	9,600
	YES	NO	19,200
	NO	YES	57,600
	YES	YES	115,200

4. COMMUNICATION PROTOCOL

4-1. Communication Setting

The communication protocol is byte oriented. Both sending and receiving bytes are in hexadecimal format. The communication parameters are as follows,

Baud rate: 9,600 ~ 115,200 bps
 Data: 8 bits
 Stop: 1 bit
 Parity: None
 Flow control: None

4-2. Communication Format

Host to Reader:

Header	Len	Command	Data	Checksum
--------	-----	---------	------	----------

Header: Communication header, 1 byte.
 From host to module: 0xBA.

Len: Byte length counting from Command to Checksum inclusively, 1 byte.

Command: Command, 1 byte.

Data: Data, variable length depends on the command type.

Checksum: XOR result from Header to Data inclusively, 1 byte.

Reader to Host:

Header	Len	Command	Status	Data	Checksum
--------	-----	---------	--------	------	----------

Header: Communication header, 1 byte.
 From module to host: 0xBD.

Len: Byte length counting from Command to Checksum inclusively, 1 byte.

Command: Command, 1 byte.
 Status: Command status, 1 byte
 Data: Data, variable length depends on the command type.
 Checksum: XOR result from Header to Data inclusively, 1 byte.

4-3. Command Overview

Command	Description
0x31	Get tag information
0x32	Get block security status
0x33	Read blocks
0x34	Write a data block
0x35	Write AFI
0x36	Write DSFID
0x37	Lock block
0x38	Lock AFI
0x39	Lock DSFID
0x40	Control PA status
0xFF	Reset

Status Overview

Status	Description
0x00	Operation success
0x01	No tag
0x04	Read fail
0x05	Write fail
0x06	Unable to read after write
0x07	Read after write error
0xF0	Checksum error
0xF1	Command code error

4-4. Command List

4-4-1. Get tag information

0xBA	Len	0x31	Checksum
------	-----	------	----------

Return:

0xBD	Len	0x31	Status	UID	AFI	DSFID	Type	Checksum
------	-----	------	--------	-----	-----	-------	------	----------

Status: 0x00: Operation success

0x01: No tag

0x04: Read fail

0xF0: Checksum error

UID: The Unique Identifier of card, 8 bytes

AFI: The Application Family Identifier, 1byte

DSFID: The Data Storage Format Identifier, 1byte

Type: 0x31: Tag_it

0x32: I.CODE SLI

4-4-2. Get block security status

0xBA	Len	0x32	block	number	Checksum
------	-----	------	-------	--------	----------

block: Start block number

number: Number of blocks to be read

Return:

0xBD	Len	0x32	Status	Data	Checksum
------	-----	------	--------	------	----------

Status: 0x00: Operation success
0x01: No tag
0x04: Read fail
0xF0: Checksum error

Data: Security status, 1 byte to 1 block

4-4-3. Read blocks

0xBA	Len	0x33	block	number	Checksum
------	-----	------	-------	--------	----------

block: Start block number

number: Number of blocks to be read, max 16 blocks

Return:

0xBD	Len	0x33	Status	Data	Checksum
------	-----	------	--------	------	----------

Status: 0x00: Operation success
0x01: No tag
0x04: Read fail
0xF0: Checksum error

Data: Blocks data returned if operation is success, 4 bytes to 1 block

4-4-4. Write data to a block

0xBA	Len	0x34	Block	Data	Checksum
------	-----	------	-------	------	----------

Block: The block number to be written, 1 byte.

Data: The data to write, 4 bytes.

Return:

0xBD	Len	0x34	Status	Data	Checksum
------	-----	------	--------	------	----------

Status: 0x00: Operation success
0x01: No tag
0x05: Write fail
0x06: Unable to read after write
0x07: Read after write error
0xF0: Checksum error

Data: Block data written if operation is success, 4 bytes.

4-4-5. Write AFI

0xBA	Len	0x35	Data	Checksum
------	-----	------	------	----------

Data: The AFI data to write, 1 bytes.

Return:

0xBD	Len	0x35	Status	Data	Checksum
------	-----	------	--------	------	----------

Status: 0x00: Operation success
0x01: No tag
0x05: Write fail
0x06: Unable to read after write
0x07: Read after write error
0xF0: Checksum error

Data: AFI data written if operation is success, 1 bytes.

4-4-6. Write DSFID

0xBA	Len	0x36	Data	Checksum
------	-----	------	------	----------

Data: The DSFID data to write, 1 bytes.

Return:

0xBD	Len	0x36	Status	Data	Checksum
------	-----	------	--------	------	----------

Status: 0x00: Operation success
 0x01: No tag
 0x05: Write fail
 0x06: Unable to read after write
 0x07: Read after write error
 0xF0: Checksum error

Data: DSFID data written if operation is success, 1 bytes.

4-4-7. Lock block

0xBA	Len	0x37	block	Checksum
------	-----	------	-------	----------

Block: The block number to be locked, 1 byte.

Return:

0xBD	Len	0x37	Status	Checksum
------	-----	------	--------	----------

Status: 0x00: Operation success
 0x01: No tag
 0x11: Lock fail
 0xF0: Checksum error

4-4-8. Lock AFI

0xBA	Len	0x38	Checksum
------	-----	------	----------

Return:

0xBD	Len	0x38	Status	Checksum
------	-----	------	--------	----------

Status: 0x00: Operation success
 0x01: No tag
 0x11: Lock fail
 0xF0: Checksum error

4-4-9. Lock DSFID

0xBA	Len	0x39	Checksum
------	-----	------	----------

Return:

0xBD	Len	0x39	Status	Checksum
------	-----	------	--------	----------

Status: 0x00: Operation success
 0x01: No tag
 0x11: Lock fail
 0xF0: Checksum error

4-4-10. Control PA status

0xBA	Len	0x40	Mask	Value	Checksum
------	-----	------	------	-------	----------

Mask: PAx which to change, bit to bit

Value: The status level

Return:

0xBD	Len	0x40	Status	Checksum
------	-----	------	--------	----------

Status: 0x00: Operation success
 0xF0: Checksum error

Example: If you want PA3 to go low, you can send
 0xBA, 0x04, 0x40, 0x08, 0x00, 0xF6

4-4-11. Reset

0xBA	Len	0xFF	Checksum
------	-----	------	----------

No return